



#### **Enclosures BantamBox Series**

### Polycarbonate Enclosure 5 x 3 x 3 Inches BantamBox Opaque Cover



Catalog Number UPC BBR128080W

List Price



### Description


5H x 3W x 3D Inches BantomBox Series polycarbonate enclosures feature flush sides making it a sought-after enclosure for OEM designs. Raised bosses accommodate back panel mounting and are sucessfully used for remote sensor mounting and small electronic controls in any environment. This conifiguration features an opaque lift off cover with 4 cover screws.

### **Application**

Small; simple design ideal for OEMs in the electronics market; circuit boards and wiring applications

### **Features**

- Available in 2 cover options: 1. Opaque Cover; 2. Clear Polycarbonate Cover
- Multiple depths available in most sizes
- Resistant to harsh environments
- Flush sides for optimal fit
- Multiple molded in bosses for a variety of mounting solutions

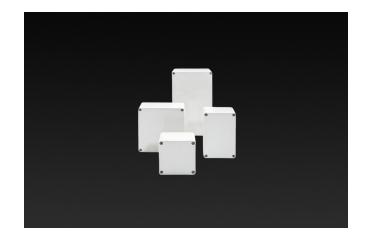



A ROBROY Brand

# **Enclosures**

## **General Information**

| Color                            | Gray   |
|----------------------------------|--|
| Cover Type                       | Opaque   |
| Mounting Type                    | Wall Mount                                     |
| Material                         | Polycarbonate                                  |
| Back Panel Screw Size            | Plastite 48 #8                                 |
| Back Panel Recommended<br>Torque | 12-16 in-lbs.                                  |
| <b>Back Panel Screw Material</b> | 304 SS   |
| Cover Screw Material             | 304 SS   |
| Metal Inserts                    | Brass  |
| Gasket Material                  | Poured In Place (PIP)<br>Polyurethane Seamless |
| Country of Origin                | Germany  |

### **Dimensions**

| Height (in)        | 5.0   |
|--------------------|-------|
| Width (in)         | 3.0   |
| Depth (in)         | 3.0   |
| Height (mm)        | 120.0 |
| Width (mm)         | 80.0  |
| Depth (mm)         | 80.0  |
| Useable Depth (in) | 2.5   |
| Useable Depth (mm) | 64.0  |



A ROBROY Brand

# **Enclosures**

### **Standards**

| NEMA 250; UL 50; UL 50e;<br>UL508A | cULus Listed File #E64358  |
|------------------------------------|----------------------------|
| Туре                               | 1; 3R; 4; 4X; 12           |
| IEC 60529                          | IP66                       |
| IEC 60529                          | cULus Listed File #E362920 |
| Temperature Range °F               | -40°F to +212°F            |
| Temperature Range °C               | -40°C to +100°C            |
| Flammability Rating                | UL94-V2                    |
| Outdoor Exposure UL746c            | (f1) Rated                 |
| CE                                 | Certified                  |