
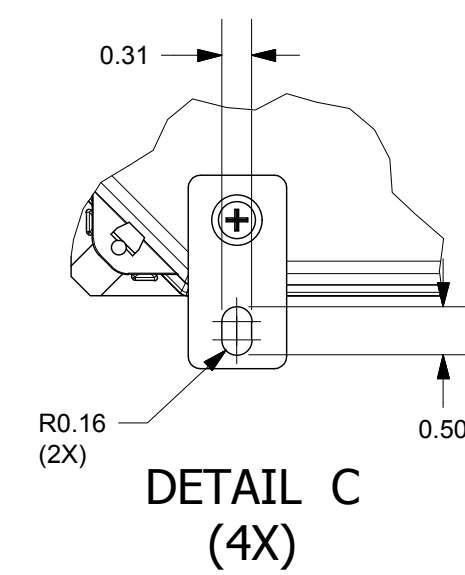
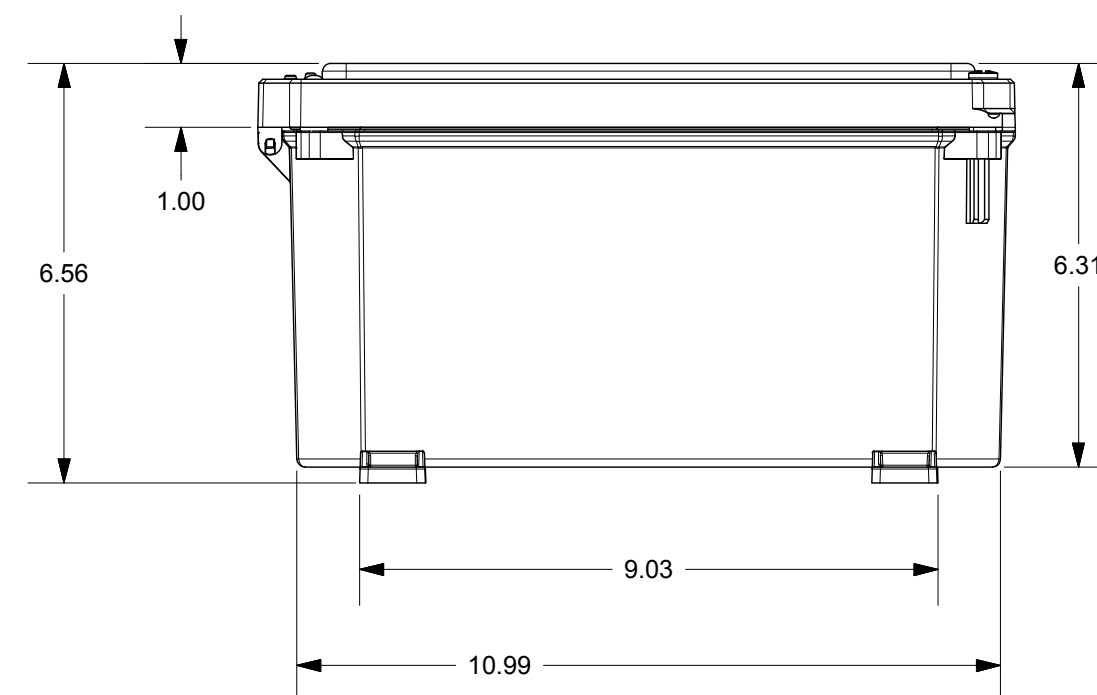
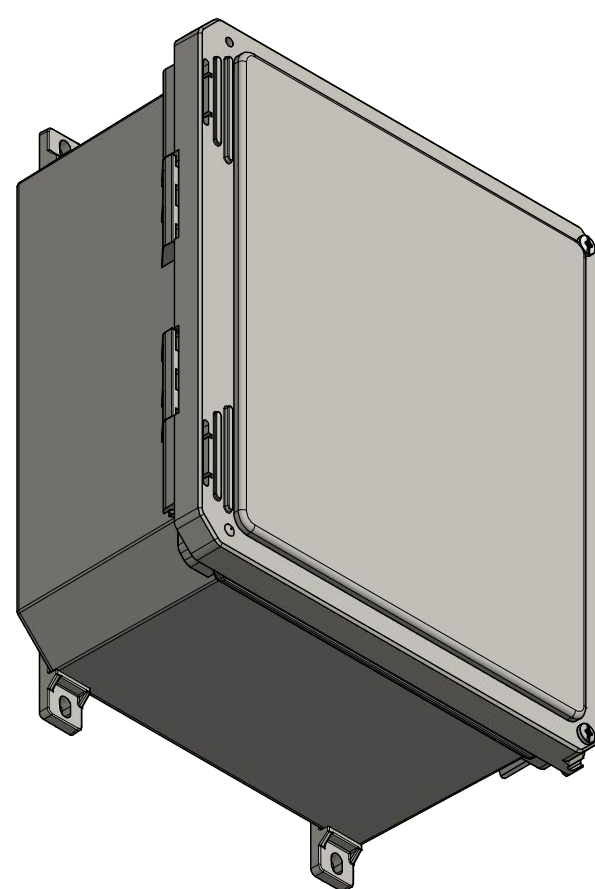
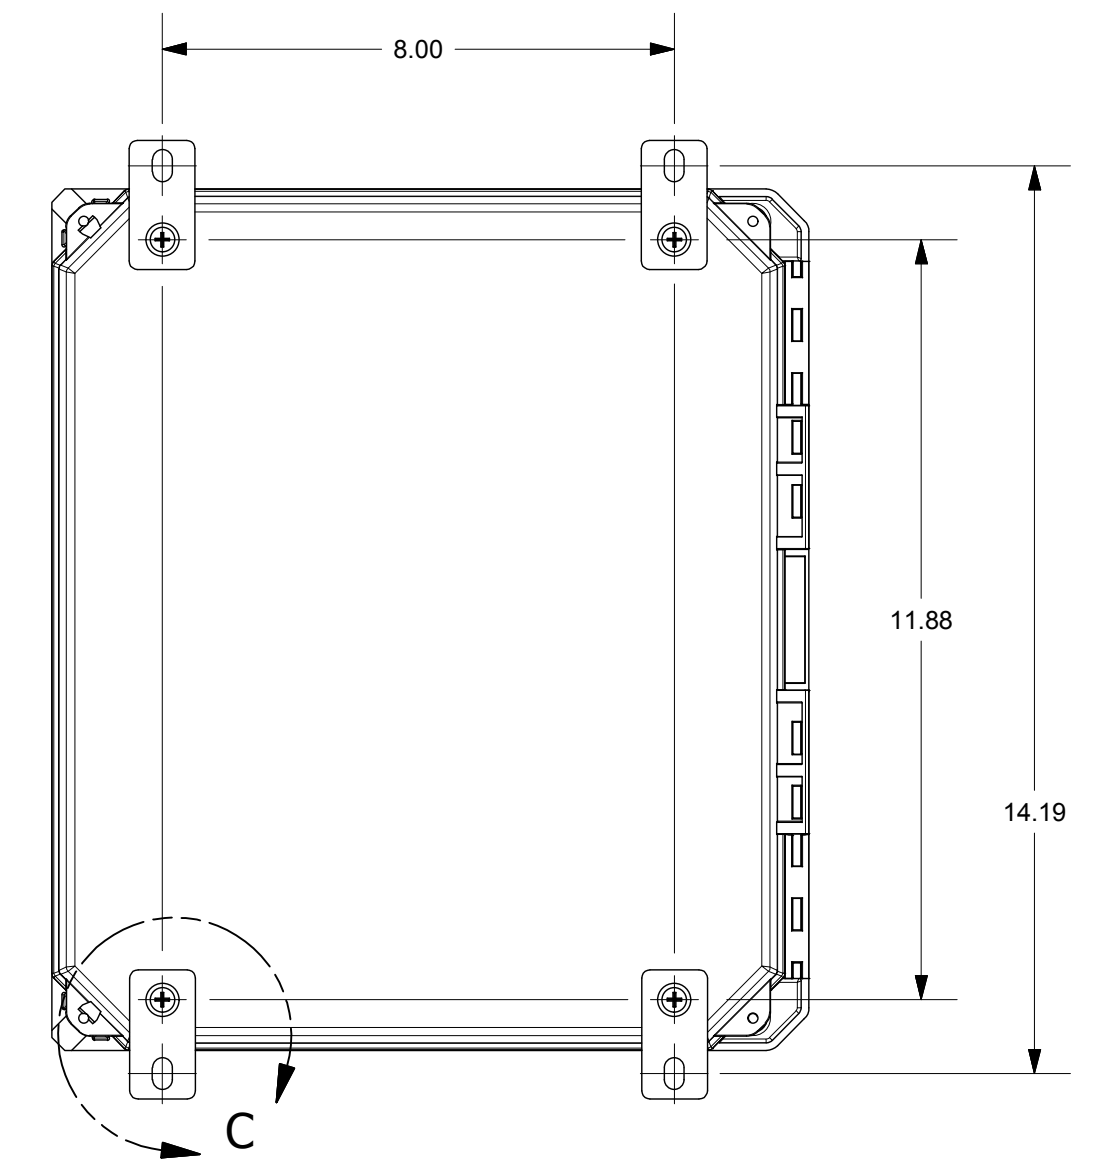
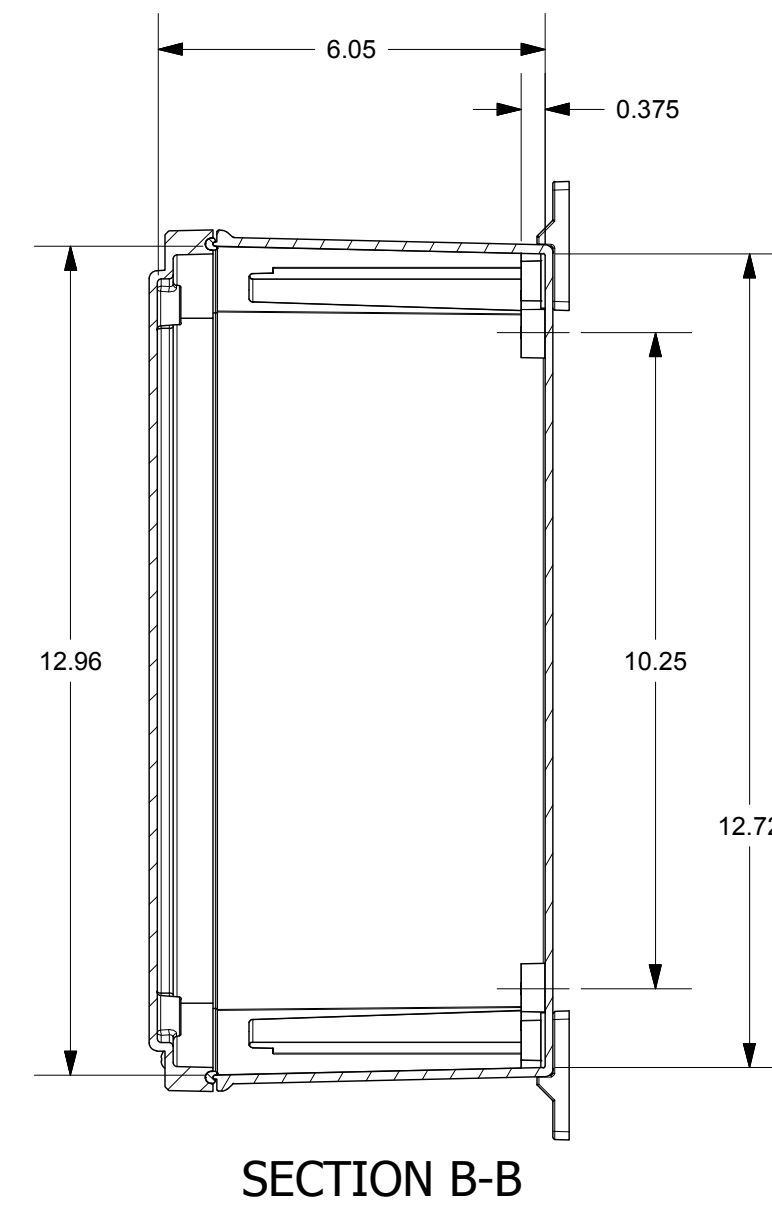
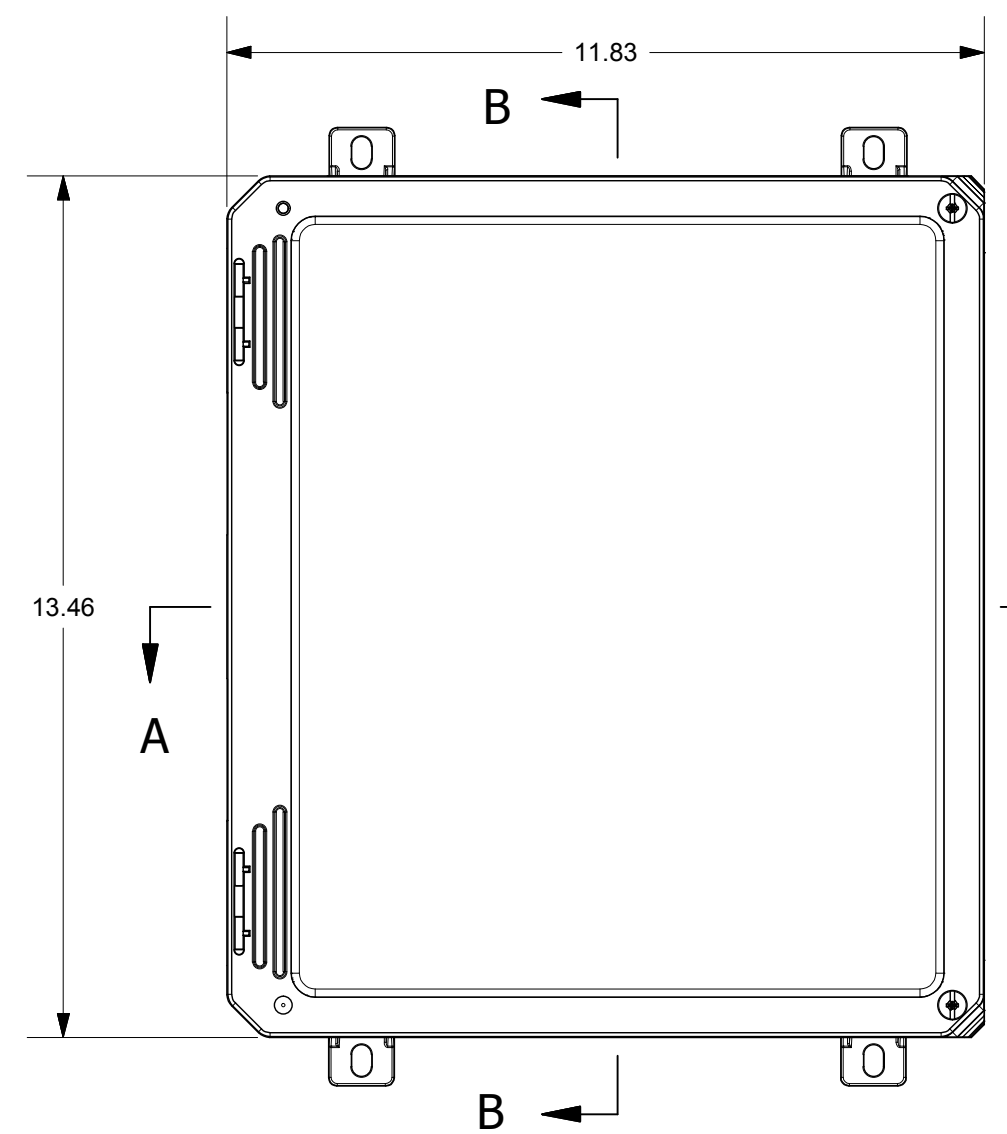


FOR REFERENCE ONLY  
MOUNTING FEET SHOWN AS INSTALLED

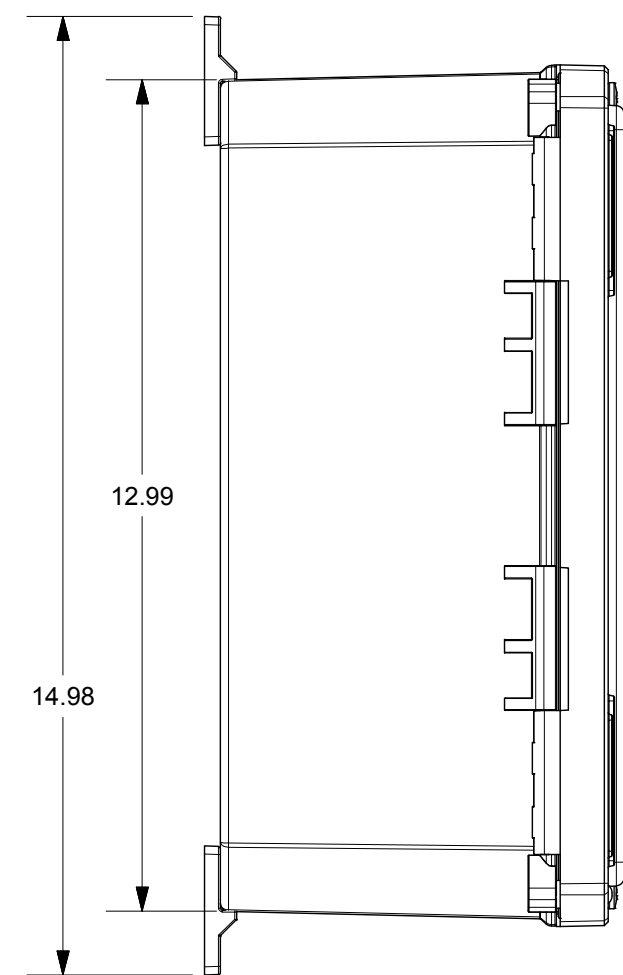




THIS DRAWING IS THE SOLE AND EXCLUSIVE PROPERTY OF ROBROY ENCLOSURES. NO PART OF THIS DRAWING MAY BE REPRODUCED, DISTRIBUTED, OR PUBLICALLY DISPLAYED IN ANY FORM OR BY ANY MEANS WITHOUT THE EXPRESS WRITTEN PERMISSION OF ROBROY ENCLOSURES. UNDER THE COPYRIGHT LAWS. COPYRIGHT © 2017 ROBROY ENCLOSURES

**END USER NOTES:**  
1. TORQUE COVER SCREWS TO 20-24 IN.-LBS. TO MAINTAIN RATINGS

**SPECIAL REQUIREMENTS**

- ASSEMBLY:**  
1. MOUNTING FEET SHOWN AS INSTALLED - FOR REFERENCE ONLY  
- SOLD SEPARATELY  
- FREEDOM SERIES MOUNTING FOOT KIT (FEFRMGFTKIT)  
- INCLUDES (4) #10-32 x 7/16 FLAT HEAD PHILLIPS HEAD SCREWS (RMSC10-32X7/16FHPH)  
2. (1) FREEDOM SERIES SCREW PACK (WSPFRFP) SHALL BE PACKAGED LOOSELY INSIDE ENCLOSURE  
**HARDWARE INCLUDED:**  
- (3) #10-32 x 1.14 PAN HEAD COMBINATION DRIVE SCREW (RMSC10-32X1-14COM)  
- (4) #10-32 x 3/8 PAN HEAD SCREW (RMSC10-32X3/8ZN)  
- (4) #10 WASHER (RMWAS10ZN)  
- (2) O-RING FOR COVER SCREW (RMASS68007)

NEMA 250: TYPE 1, 3, 3S, 4X, 12, 13 IEC 60529: IP66		STANDARD P/N: FR121006HW	ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED		TOLERANCES UNLESS SPECIFIED	.XX ± 0.03	.XXX ± 0.010																																													
COLOR: GLACIER GREY (WPR3X13) COLOR STANDARD: PANTONE 428 C		CUSTOMER DWG:																																																		
MATERIAL: FIBERGLASS REINFORCED POLYESTER (FRP)																																																				
<table border="1"> <thead> <tr> <th>REV</th> <th>DESCRIPTION</th> <th>DATE</th> <th>ENG</th> </tr> </thead> <tbody> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>-</td><td>-</td></tr> </tbody> </table>		REV	DESCRIPTION	DATE	ENG	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	<table border="1"> <tr> <td>WWW.ATTABOX.COM</td> <td>DRAWN BY</td> <td>DATE</td> <td>CUSTOMER</td> <td>DWG</td> </tr> <tr> <td></td> <td>E91</td> <td>05/10/17</td> <td></td> <td>FR121006HW</td> </tr> <tr> <td></td> <td>SCALE</td> <td>DESCRIPTION</td> <td>PART NUMBER</td> <td></td> </tr> <tr> <td></td> <td>DO NOT SCALE</td> <td>STANDARD ENCLOSURE</td> <td>ATFR121006HW</td> <td></td> </tr> </table>	WWW.ATTABOX.COM	DRAWN BY	DATE	CUSTOMER	DWG		E91	05/10/17		FR121006HW		SCALE	DESCRIPTION	PART NUMBER			DO NOT SCALE	STANDARD ENCLOSURE	ATFR121006HW		<p><b>Robroy Enclosures</b> 500 Maple Street Belding, Michigan 48809 Phone: 616-794-0700 Fax: 616-749-3378</p>	
REV	DESCRIPTION	DATE	ENG																																																	
-	-	-	-																																																	
-	-	-	-																																																	
-	-	-	-																																																	
-	-	-	-																																																	
-	-	-	-																																																	
-	-	-	-																																																	
WWW.ATTABOX.COM	DRAWN BY	DATE	CUSTOMER	DWG																																																
	E91	05/10/17		FR121006HW																																																
	SCALE	DESCRIPTION	PART NUMBER																																																	
	DO NOT SCALE	STANDARD ENCLOSURE	ATFR121006HW																																																	

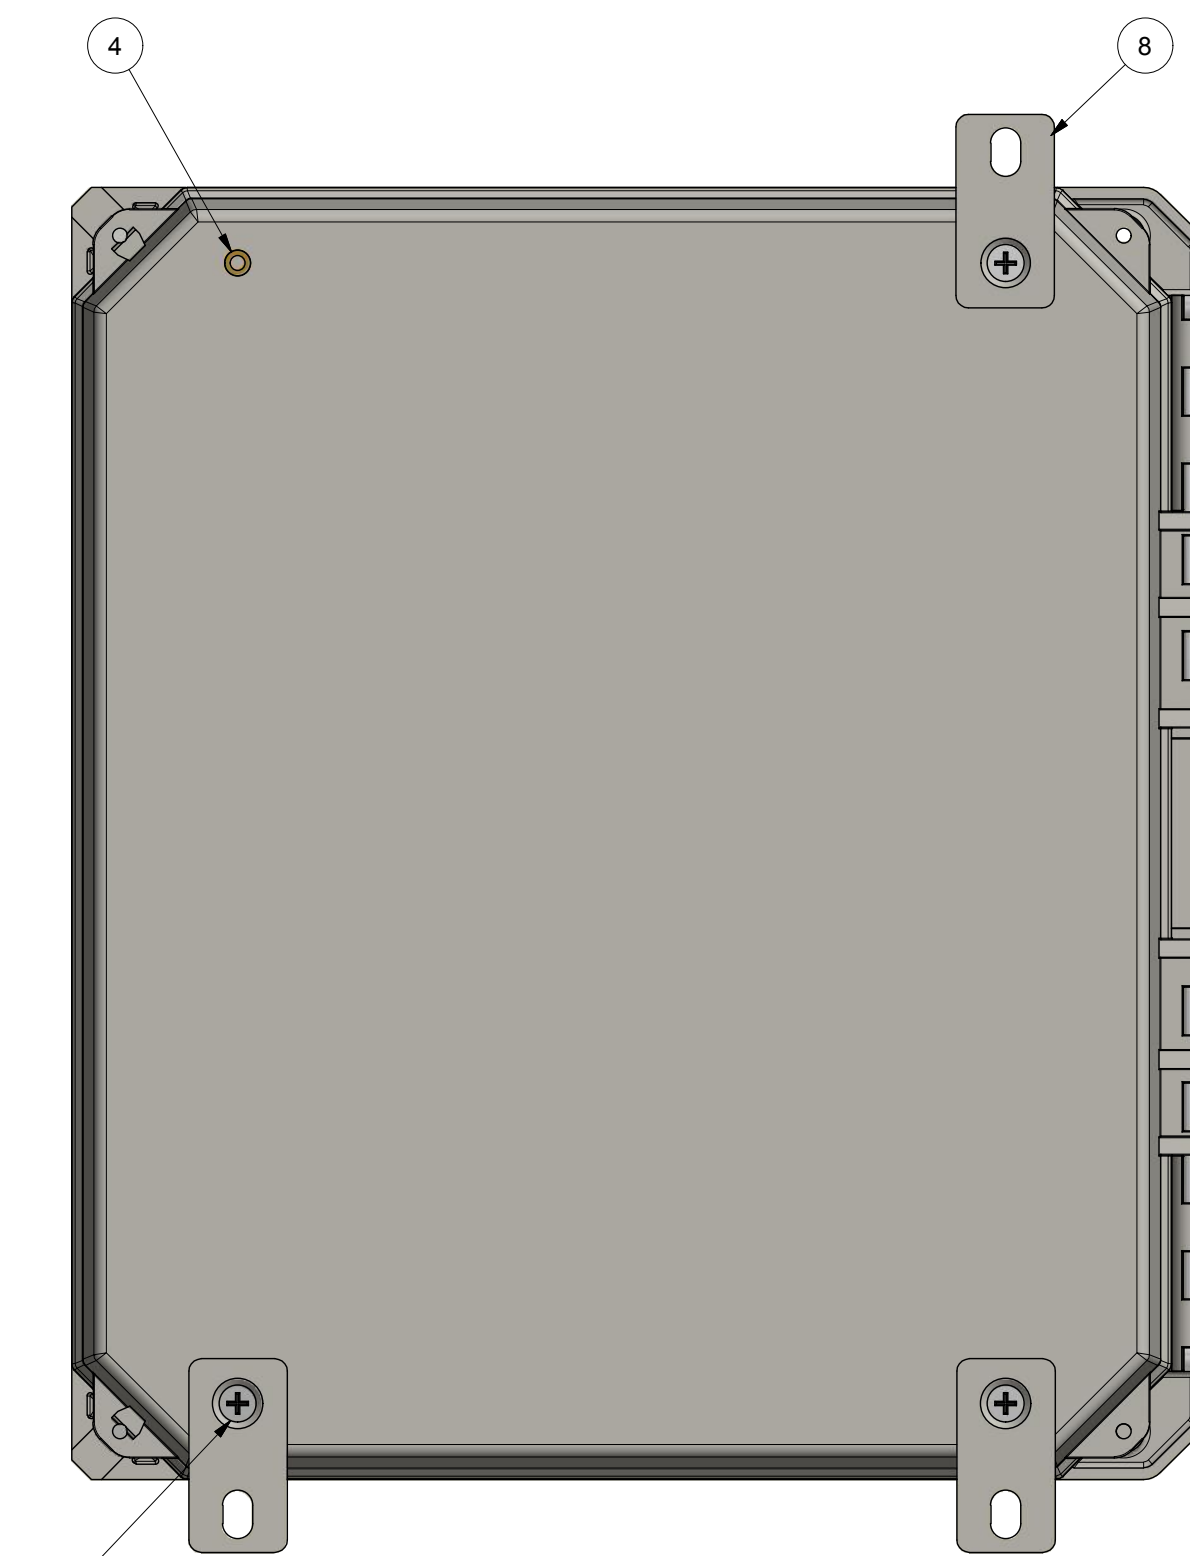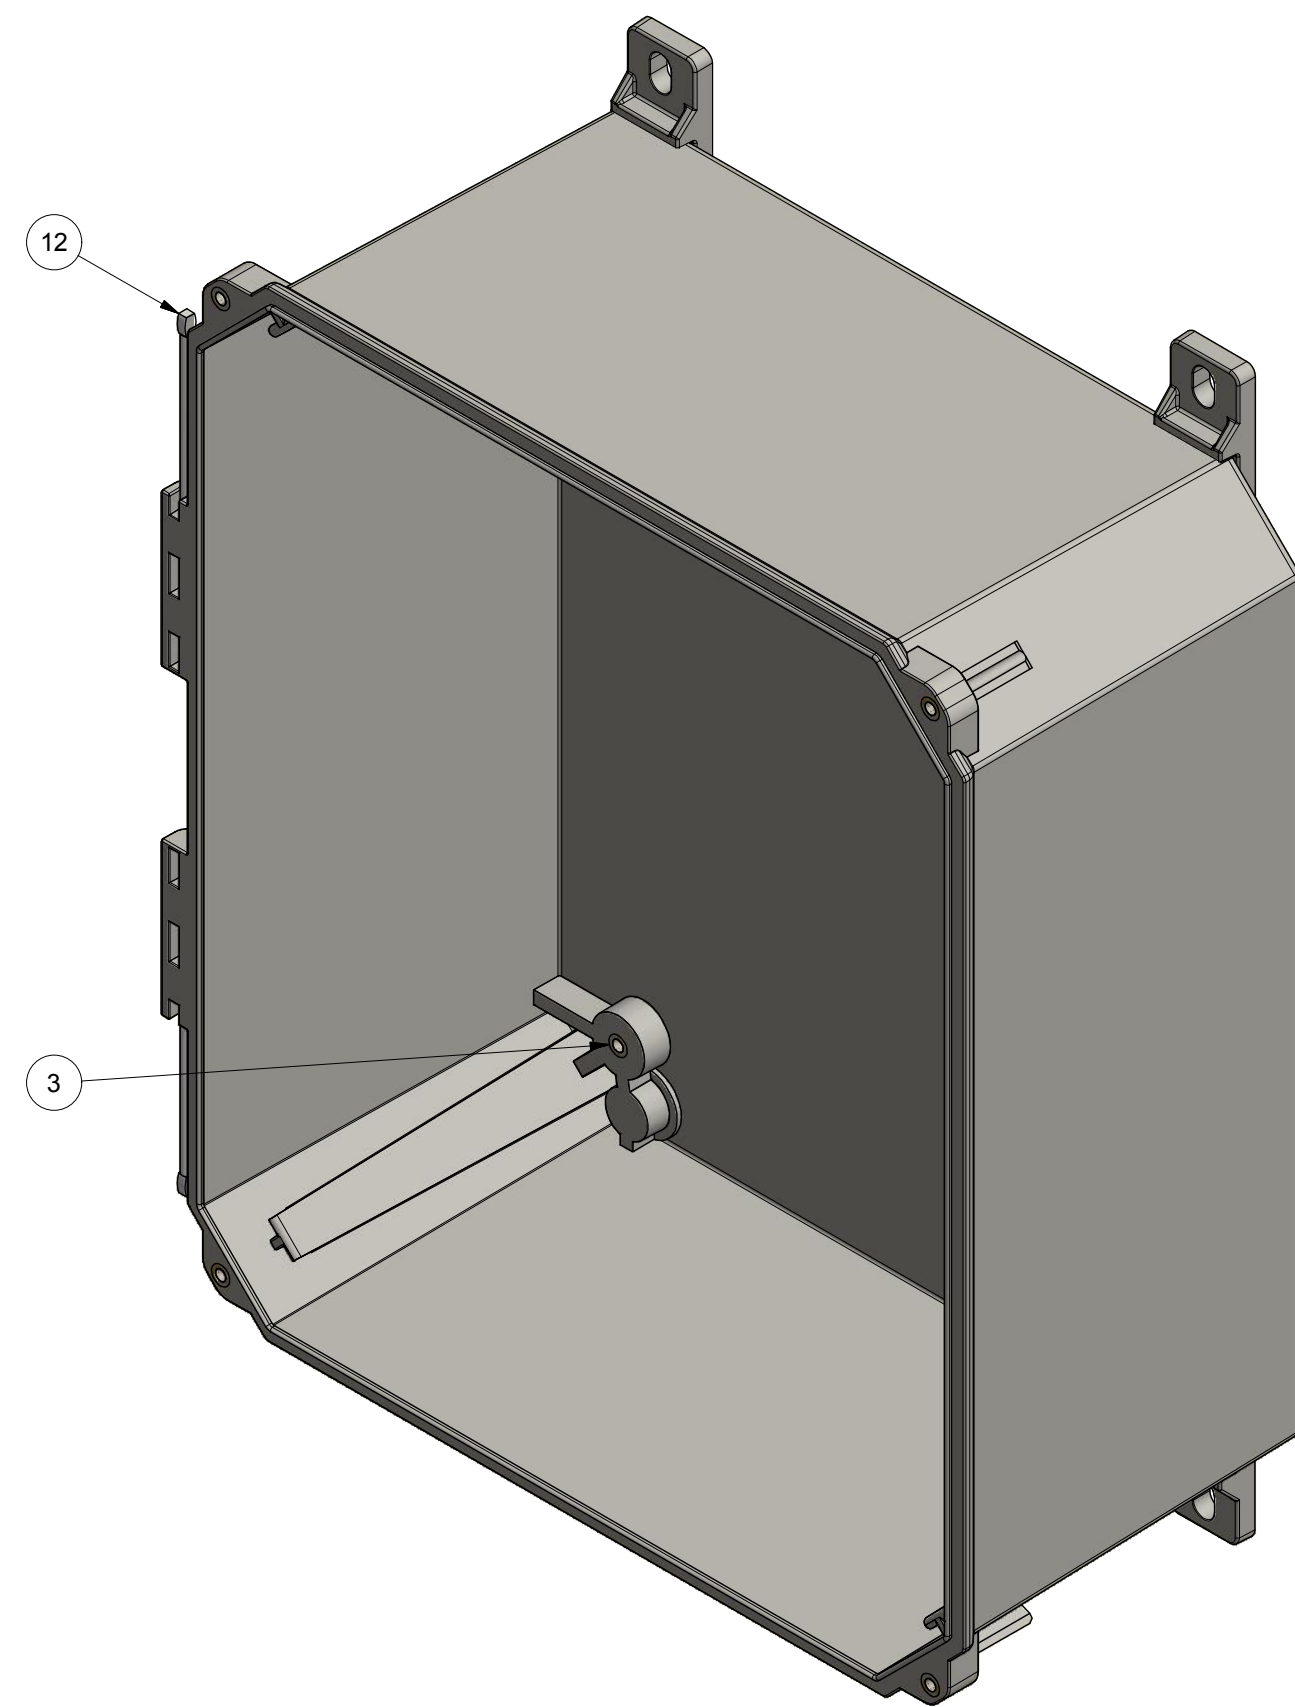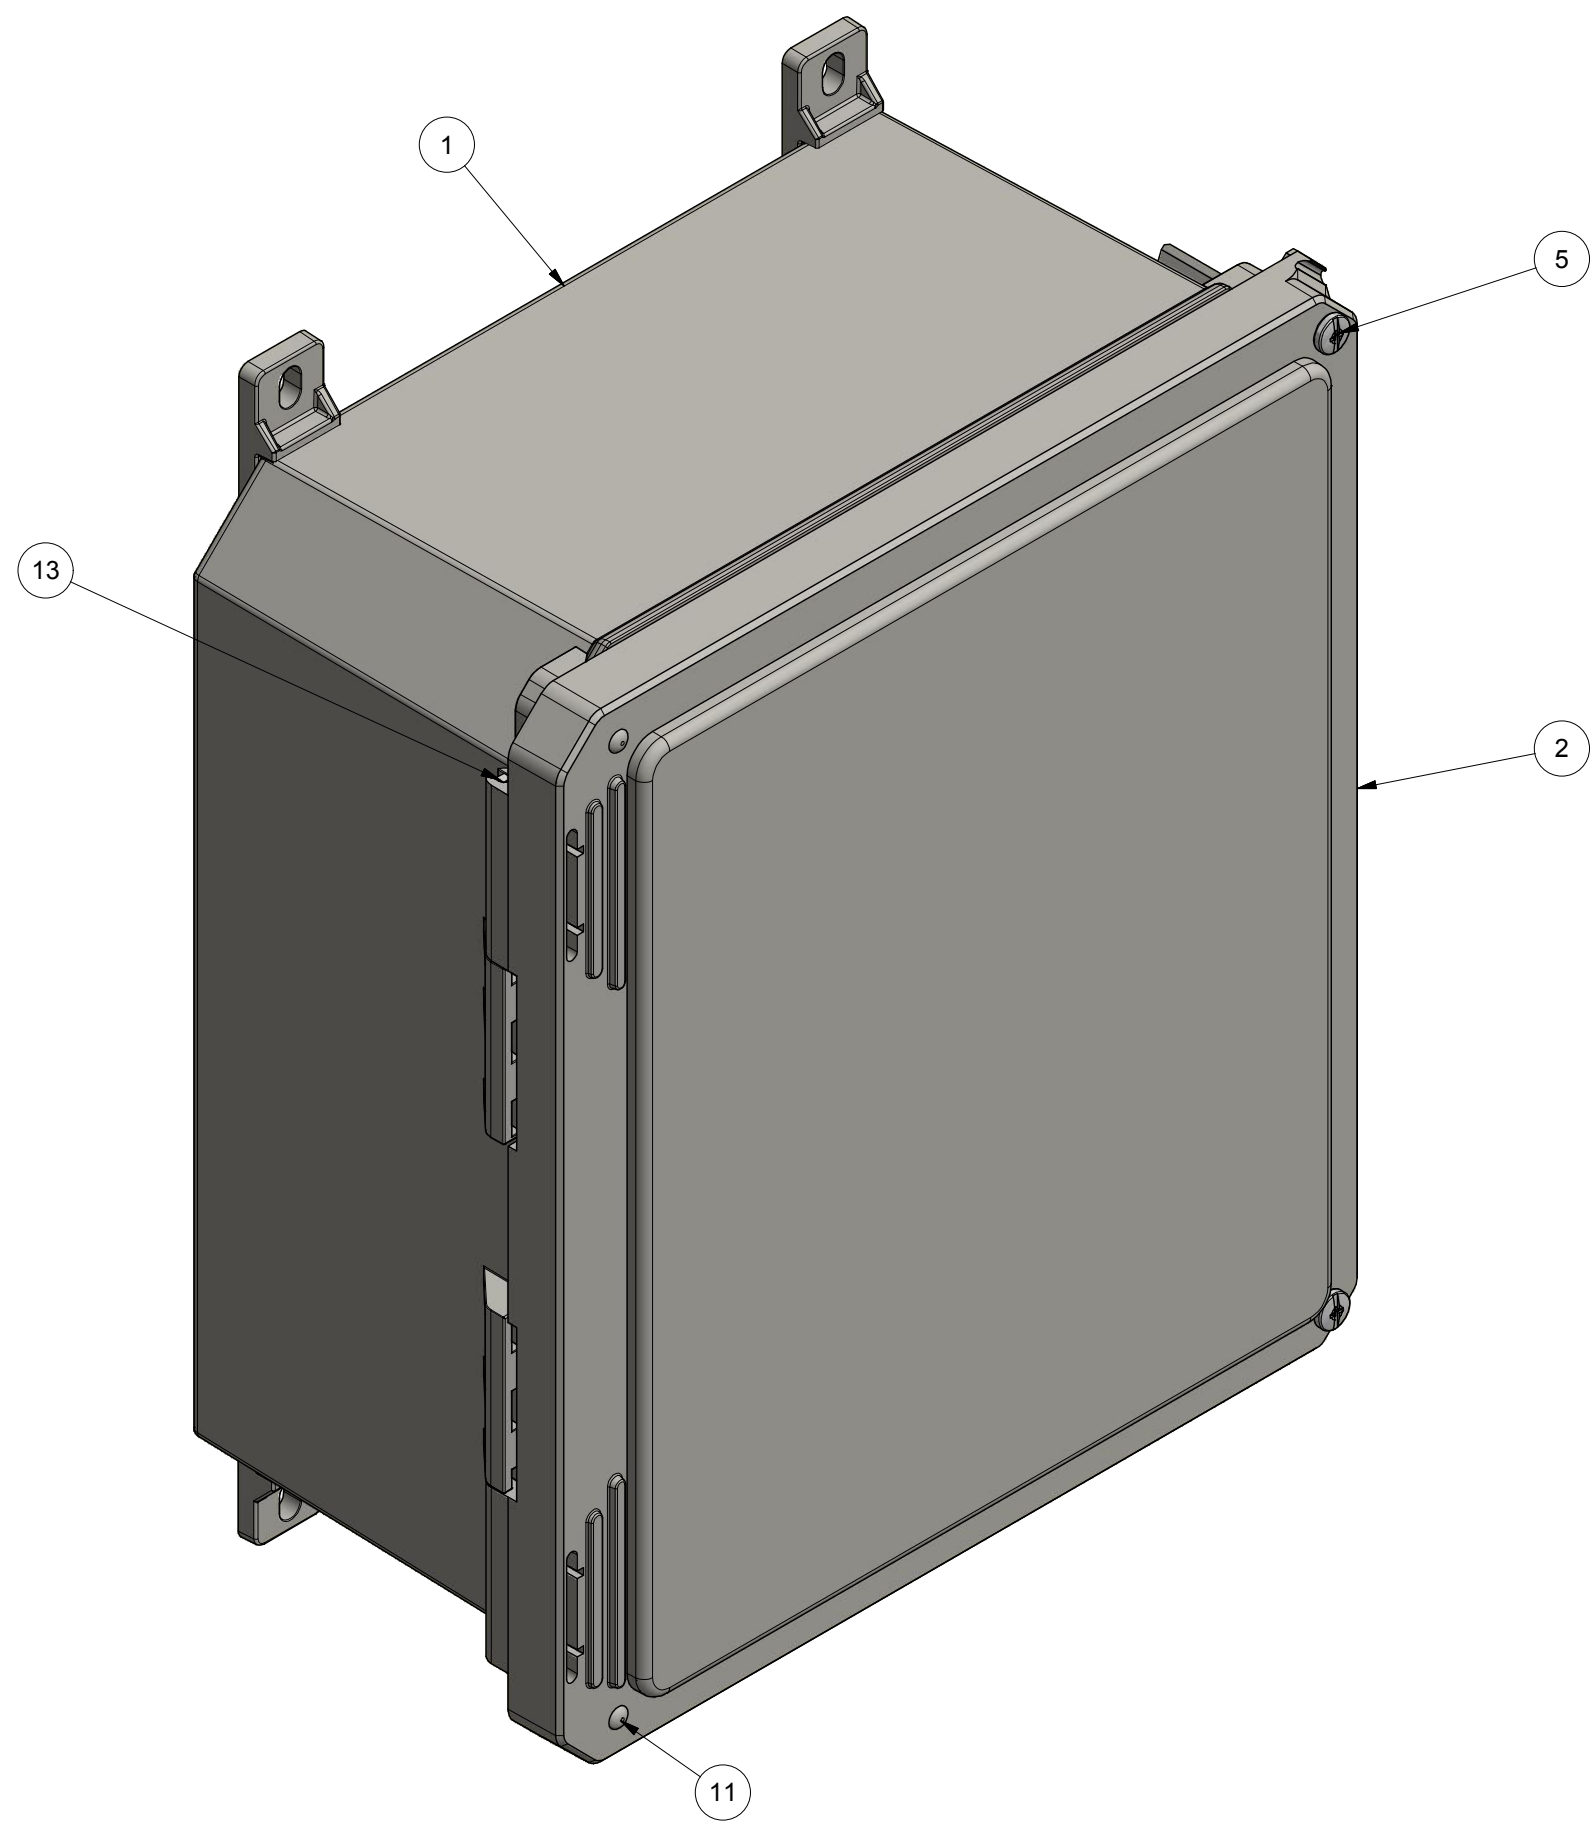

BACK SIDE  
(1) MOUNTING FOOT REMOVED FOR CLARITY  
TORQUE SCREWS TO 25 IN.-LBS



NOTES:  
1. RTV 732 SILICONE SEALANT SHALL BE APPLIED ON HINGE PINS AFTER INSTALLATION

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	WP121006B	FR121006 MOLDED HINGE BOX
2	1	WP121006U	FR121006 GASKETED HINGE COVER
3	8	RMINS45821P	#10-32 THREADED BRASS INSERT
4	4	RMINS700113	#10-32 X 5/16 THREADED BRASS INSERT
5	2	RMSC10-32X1-1/4COM	#10-32 X 1-1/4 COMBINATION DRIVE SCREW (INCLUDED WITH WP2PKFRBP)
6	2	RMAS568007	O-RING FOR COVER SCREW (INCLUDED WITH WP2PKFRBP)
7	1	RMLABBLANK3X2	FR121006HW LABEL
8	1	FEFRMGFTKIT	FREEDOM SERIES MOUNTING FOOT KIT (INCLUDES (4) MOUNTING FEET WITH SCREWS)
9	4	RMSC10-32X7/16FHPH	10-32 X 7/16 FLAT HEAD PHILLIPS HEAD SCREW (INCLUDED WITH FEFRMGFTKIT)
10	1	WP2PKFRBP	FREEDOM SERIES SCREW PACK
11	2	RMAT1656AA	COVER BUSHING
12	2	RMHINGAT40006-03	FREEDOM SERIES HINGE PIN
13	AR	RTV-732	SILICONE SEALANT

THIS DRAWING IS THE SOLE AND EXCLUSIVE PROPERTY OF ROBROY ENCLOSURES. NO PART OF THIS DRAWING MAY BE REPRODUCED, DISTRIBUTED, OR PUBLICALLY DISPLAYED IN ANY FORM OR BY ANY MEANS WITHOUT THE EXPRESS WRITTEN PERMISSION OF ROBROY ENCLOSURES. ALL RIGHTS RESERVED. UNDER THE COPYRIGHT LAWS. COPYRIGHT © 2017 ROBROY ENCLOSURES

**ASSEMBLY:**  
1. MOUNTING FEET SHOWN AS INSTALLED - FOR REFERENCE ONLY  
-SOLD SEPARATELY  
-FREEDOM SERIES MOUNTING FOOT KIT (FEFRMGFTKIT)  
-INCLUDES (4) #10-32 X 7/16 FLAT HEAD PHILLIPS HEAD SCREWS (RMSC10-32X7/16FHPH)  
2. (1) FREEDOM SERIES SCREW PACK (WP2PKFRBP) SHALL BE PACKAGED LOOSELY INSIDE ENCLOSURE  
HARDWARE INCLUDED:  
-(3) #10-32 X 1-1/4 PAN HEAD COMBINATION DRIVE SCREW (RMSC10-32X1-1/4COM)  
-(4) #10-32 X 3/8 PAN HEAD SCREW (RMAS568007)  
-(4) #10 WASHER (RMWAS10ZN)

**SPECIAL REQUIREMENTS**

NEMA 250: TYPE 1, 3, 3S, 4X, 12, 13  
IEC 60529: IP66  
COLOR: GLACIER GREY (WPR3X13)  
COLOR STANDARD: PANTONE 428 C

MATERIAL: FIBERGLASS REINFORCED POLYESTER (FRP)

STANDARD P/N: FR121006HW  
CUSTOMER DWG:

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED

TOLERANCES .XX .XXX  
UNLESS SPECIFIED ± 0.03 ± 0.010



**Robroy Enclosures**  
500 Maple Street  
Belding, Michigan 48809  
Phone: 616-794-0700  
Fax: 616-749-3378

DRAWN BY: E91		DATE: 05/10/17	CUSTOMER:	DWG:
SCALE:	DO NOT SCALE	DESCRIPTION:	STANDARD ENCLOSURE	PART NUMBER:
				ATFR121006HW