
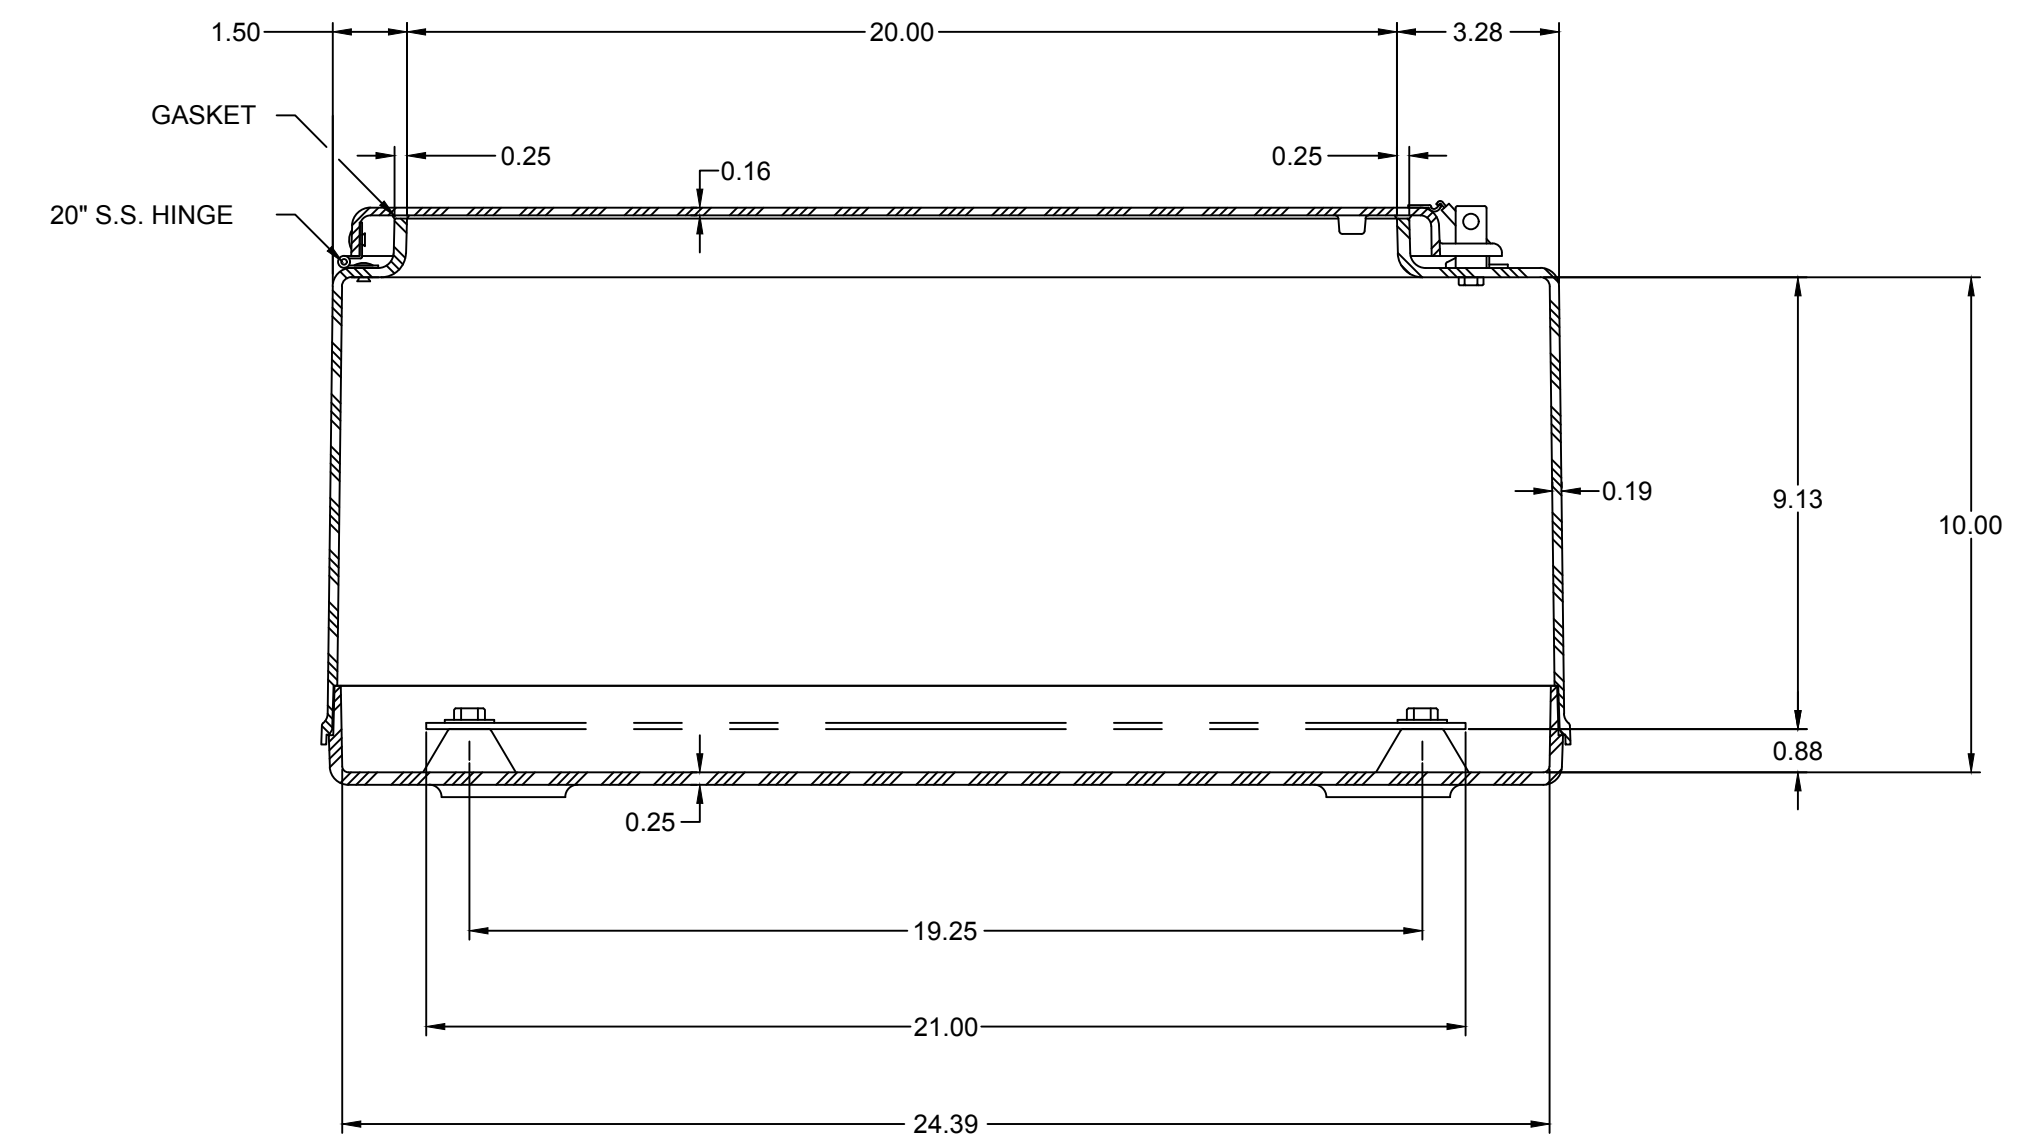


SECTION B-B

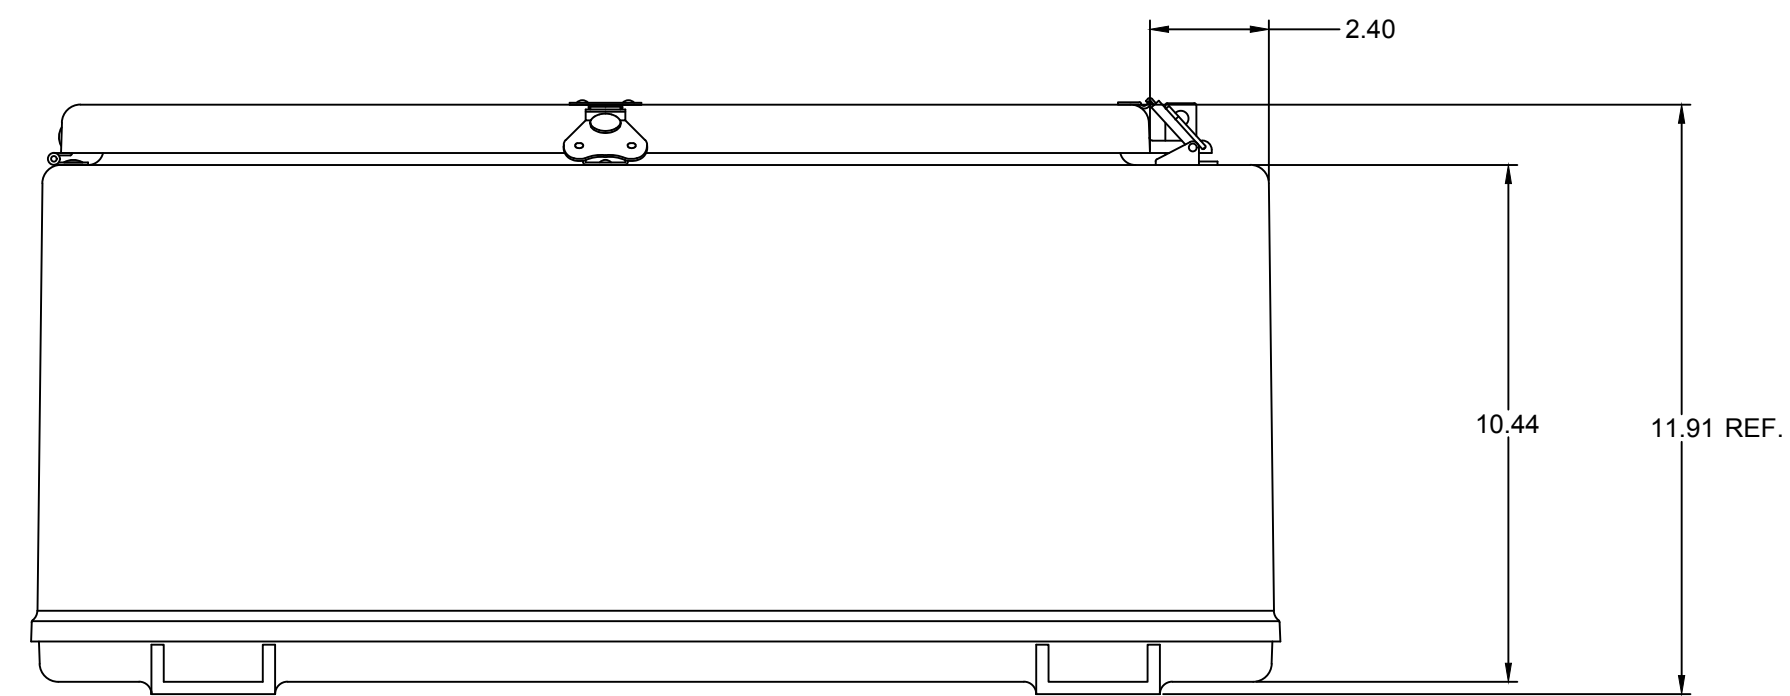

SECTION A-A

THIS DRAWING IS THE SOLE AND EXCLUSIVE PROPERTY OF ROBROY ENCLOSURES. NO PART OF THIS DRAWING MAY BE REPRODUCED, DISTRIBUTED, OR PUBLICALLY DISPLAYED IN ANY FORM OR BY ANY MEANS WITHOUT THE EXPRESS WRITTEN PERMISSION OF ROBROY ENCLOSURES. ALL RIGHTS RESERVED. UNDER THE COPYRIGHT LAWS. COPYRIGHT © 2017 ROBROY ENCLOSURES

**SPECIAL REQUIREMENTS**

NEMA 250: TYPE 1, 3, 3R, 4X, 12 IEC 60529: IP66		STANDARD P/N:	T242410HWT	ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED	TOLERANCES UNLESS SPECIFIED	.XX ± 0.03	.XXX ± 0.010
COLOR: GLACIER GRAY (WRP3X13) COLOR STANDARD: PANTONE 428 C		CUSTOMER DWG:		<b>ATTABOX</b> Robroy Enclosur 500 Maple St Belding, Michigan 488 Phone: 616-794-07 Fax: 616-749-33			
MATERIAL: FIBERGLASS REINFORCED POLYESTER (FRP)		REVISION HISTORY					
REV	DESCRIPTION	DATE	ENG	DRAWN BY: E91 DATE: 05/23/17 CUSTOMER: DWG: T242410HWT SCALE: DO NOT SCALE DESCRIPTION: STANDARD ENCLOSURE PART NUMBER: ATT242410HWT			
-	-	-	-				
-	-	-	-				
-	-	-	-				
-	-	-	-				